

LINEAR FLOOR DRAIN TO THE WALL WITH STAINLESS STEEL FRAME AND SIDE OUTLET D40




» Flow rate: 30-38 l/min. | Lowest installation height: 50 mm | Outlet diameter: 40 mm



DRAIN DIMENSIONS

L [mm]	350	450	650	750	850	950
L1 [mm]	415	515	715	815	915	1015
L2 [mm]	295	295	595	695	795	895
Weight [kg/pc]	1,25	1,43	1,96	2,12	2,36	2,70

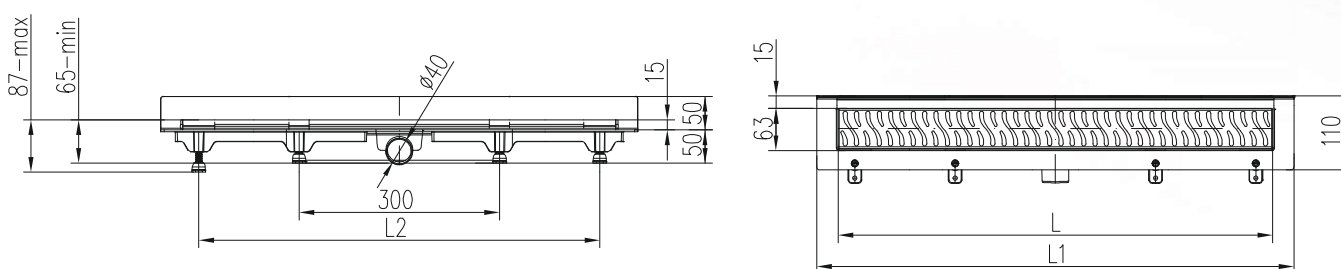

PART NUMBER

	LINE	HARMONY	SQUARE	DROPS	MEDIUM	KLASIK/FLOOR
gloss	CH 350 LN 2	CH 350 HN 2	CH 350 SN 2	CH 350 DN 2	CH 350 MN 2	CH 350 KN 2
matte	CH 350 LN 3	CH 350 HN 3	CH 350 SN 3	CH 350 DN 3	CH 350 MN 3	CH 350 KN 3
gloss	CH 450 LN 2	CH 450 HN 2	CH 450 SN 2	CH 450 DN 2	CH 450 MN 2	CH 450 KN 2
matte	CH 450 LN 3	CH 450 HN 3	CH 450 SN 3	CH 450 DN 3	CH 450 MN 3	CH 450 KN 3
gloss	CH 650 LN 2	CH 650 HN 2	CH 650 SN 2	CH 650 DN 2	CH 650 MN 2	CH 650 KN 2
matte	CH 650 LN 3	CH 650 HN 3	CH 650 SN 3	CH 650 DN 3	CH 650 MN 3	CH 650 KN 3
gloss	CH 750 LN 2	CH 750 HN 2	CH 750 SN 2	CH 750 DN 2	CH 750 MN 2	CH 750 KN 2
matte	CH 750 LN 3	CH 750 HN 3	CH 750 SN 3	CH 750 DN 3	CH 750 MN 3	CH 750 KN 3
gloss	CH 850 LN 2	CH 850 HN 2	CH 850 SN 2	CH 850 DN 2	CH 850 MN 2	CH 850 KN 2
matte	CH 850 LN 3	CH 850 HN 3	CH 850 SN 3	CH 850 DN 3	CH 850 MN 3	CH 850 KN 3
gloss	CH 950 LN 2	CH 950 HN 2	CH 950 SN 2	CH 950 DN 2	CH 950 MN 2	CH 950 KN 2
matte	CH 950 LN 3	CH 950 HN 3	CH 950 SN 3	CH 950 DN 3	CH 950 MN 3	CH 950 KN 3